

# Amplifier

Adjustable ...  
0 / 50VDC.  
external adjustment




Reference: KC:010 / 050-150mA


## TECHNICAL CHARACTERISTICS

- Supply voltage 95-250 VAC
- Input range ..... 0/10V,
- Output range ..... 0/50V.
- External adjustment for the output 10 ..50V, (for 10V input).
- Response time 2 msg.
- 3 Nipple PG7 Poliamide. 1 signal input  
1 output  
1 VAC supply

## Element position

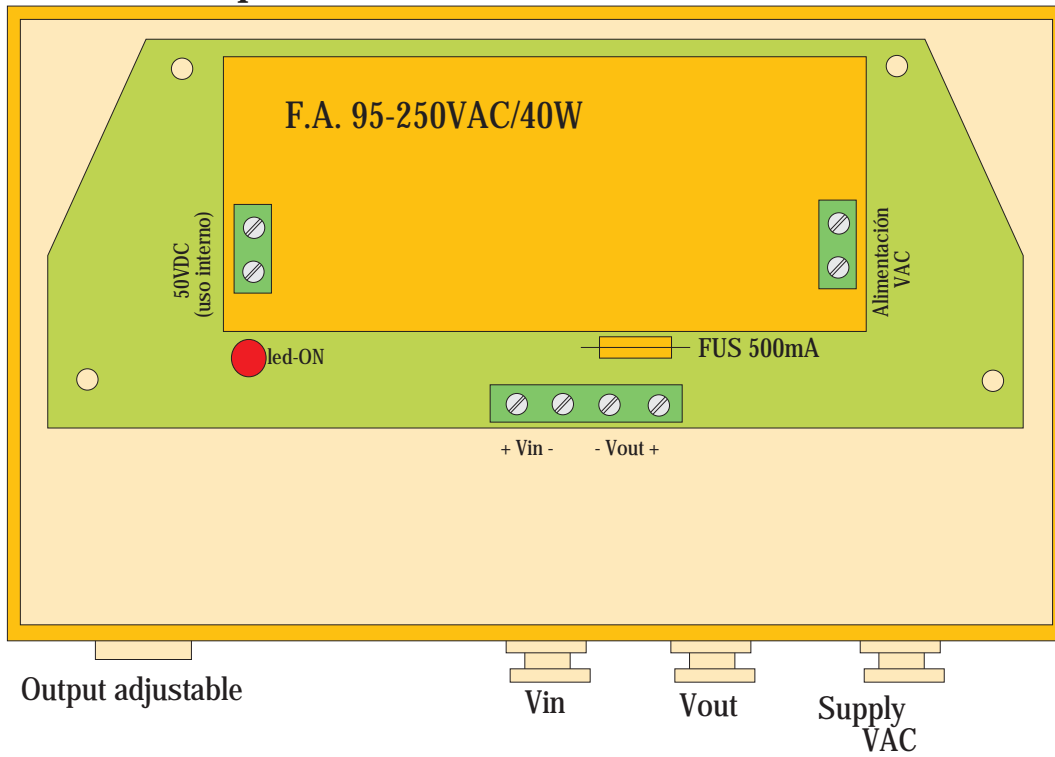

## DIMENSIONS (mm)

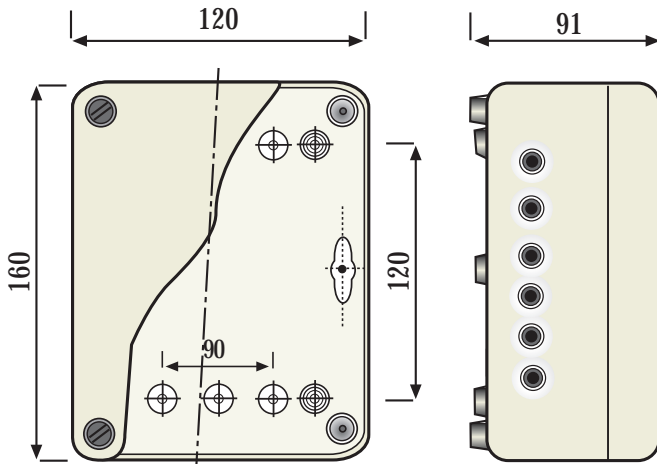

Body	ABS
Protection grade	IP55 (IECV529)
Material temp.	-40°C / +80°C
in continuous use	max. +60°C
Crash resistance	good
Color standar	gray (RAL 7035)
Gasket material	poliuretane
Non toxic products, selfstinguishing	
External dim.	160 x 120 x 91
Out.connex.	PG7 poliamide