




COMPARATOR

WIRE BREAK DETECTOR
DISTANCE TRANSMISOR
Potential Free Connections

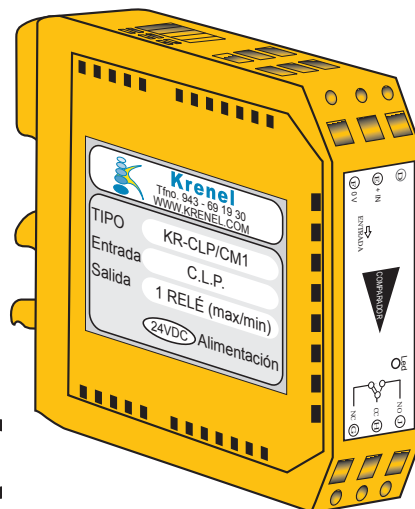


CONNECTIONS

Potential Free Connectors

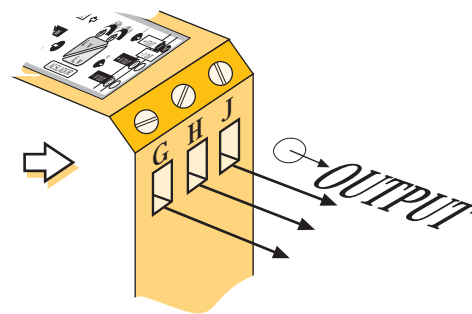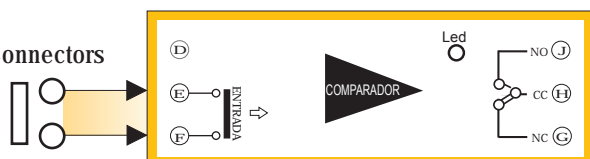

TECHNICAL DATA

Max. consumption	45 mA
Input type	Potential free contact
Switched contact output	6A / 230 VAC
Supply	24VDC or 230VAC



ALIMENTACIÓN


REGULATIONS COMPLIANCE

Electromagnetic Compatibility	2004 / 108 / CE
Low voltage for amb. industrial	2006/95/CEE
Electromagnetic emissions	UNE-EN 50081-2
Electromagnetic immunity	UNE-EN 50082-2
Waste electronics(WEEE)	2002 / 96 / CE

AMBIENTALS

Working temp.	-10 / +60 °C
Storage temp.	-40 / +80 °C
T ^a coefficient	50 ppm / °C
Warm up time	5 min.

DIMENSIONS (mm)

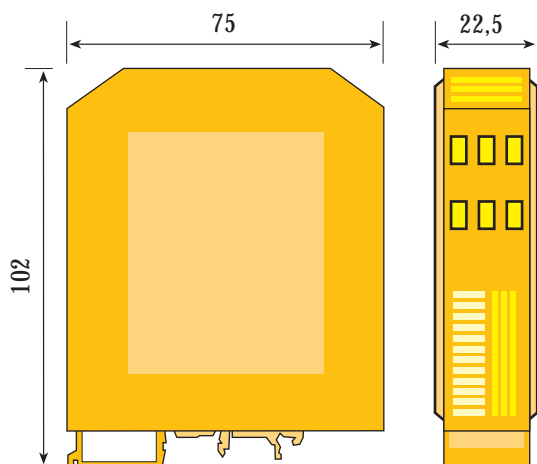

MECHANICAL

Protection:	IP 20
Connection wire:	<2,5 mm, 12 AWG
Box:	Polyamide UL94. V2
Weight: max.	90 gr.
Rail:	EN 50035, EN 50022

MODELS

SUPPLY	24VDC	230VAC
	KR-CLP/CM1	KR:CLP/CM1